



SEC. 34, TWP. 21N, R.6E.

IP
CONE
STONE

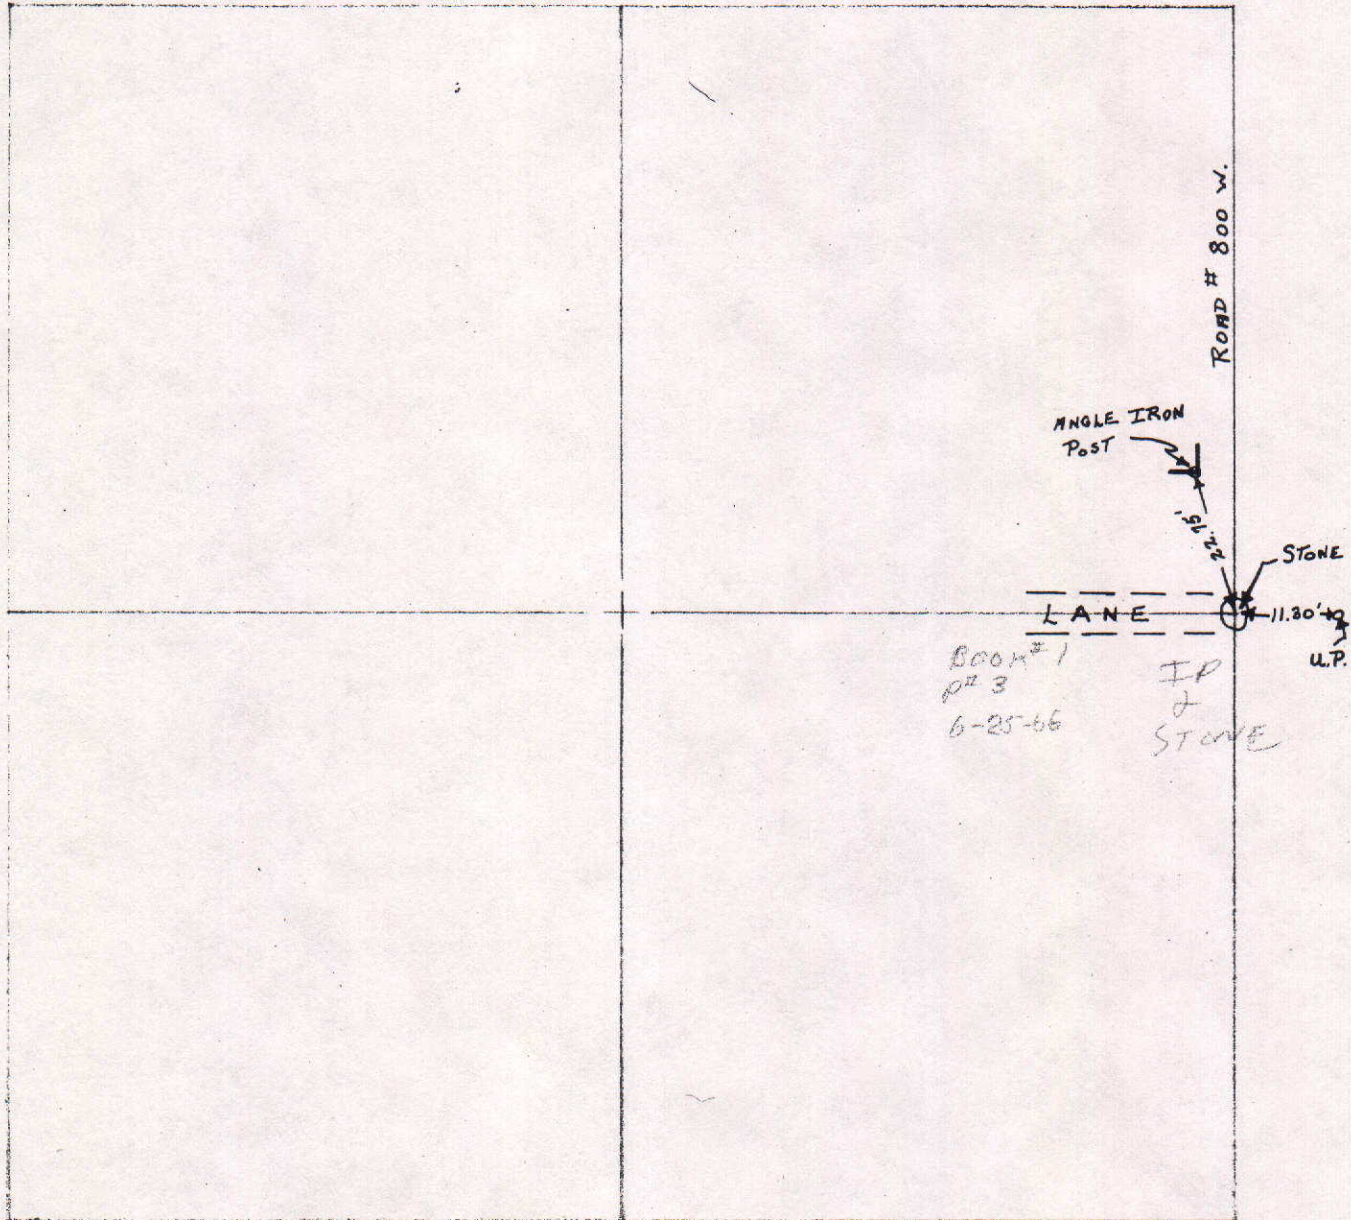

COUNTY SURVEYOR'S - SECTION CORNER TIES


SECTION	TOWNSHIP	RANGE	BOOK	PAGE	ELEVATION	UC ZONE	STATE PLANE COORD	LATITUDE	LONGITUDE
34	21N	6E	21	18			X= Y=		

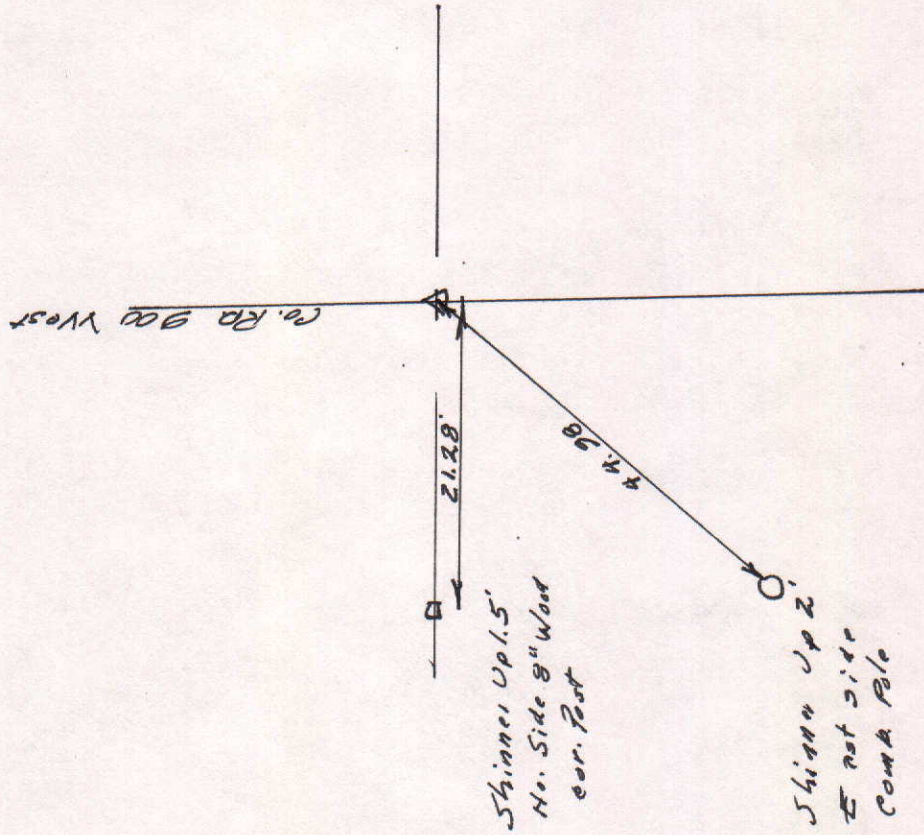

Tied by: LP & JY Date: 6-27-97
 Drawn by: LP Date: 7-8-97
 Checked by: _____ Date: _____

DESCRIPTION OF MONUMENT

Found RA 0.3' below App
 N.M.D. Dig & Found nothing.
 Set 5/8" x 2' Rebar



MARKER LOCATION

Approved: _____ Date: _____
 COUNTY SURVEYOR

COUNTY SURVEYOR'S - SECTION CORNER TIES



SECTION	TOWNSHIP	RANGE	BOOK	PAGE	ELEVATION	UC ZONE STATE PLANE COORD		LATITUDE	LONGITUDE
34	21N	6E	15	37		X=	Y=		



Tied by: LP JJY Date: 6-20-97
 Drawn by: LP Date: 7-21-97
 Checked by: _____ Date: _____

DESCRIPTION OF MONUMENT

1" Brass pin (Bent) used
straight portion flush with
asphalt pavement.

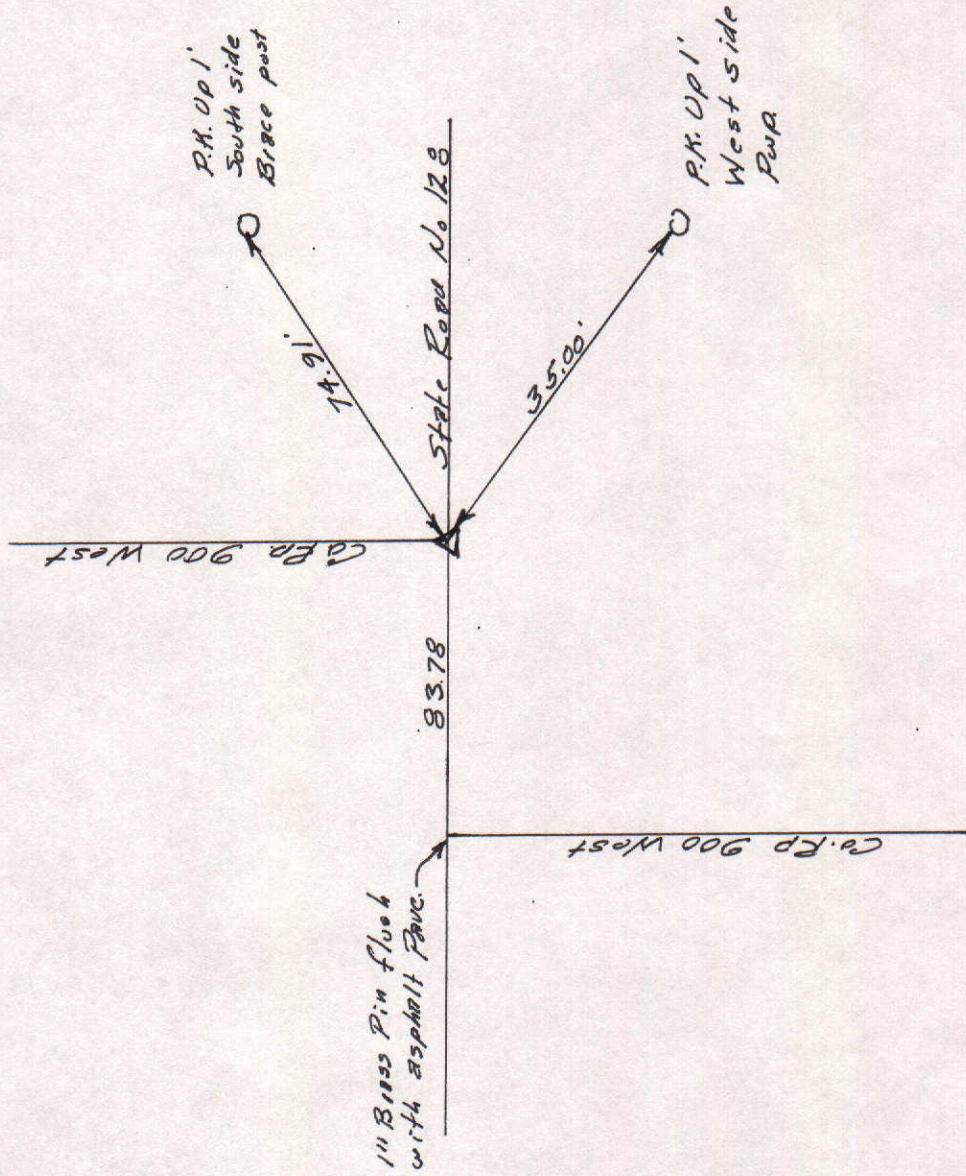

Approved: _____ Date: _____
 COUNTY SURVEYOR



COUNTY SURVEYOR'S - SECTION CORNER TIES

SECTION	TOWNSHIP	RANGE	BOOK	PAGE	ELEVATION	UC ZONE	STATE PLANE COORD	LATITUDE	LONGITUDE
34	21N	6E	13	38			X= Y=		



Tied by: LP & J.Y Date: 6-20-97
 Drawn by: LP Date: 7-21-97
 Checked by: _____ Date: _____

DESCRIPTION OF MONUMENT
Railroad Spike 0.2' below asphalt pavement.

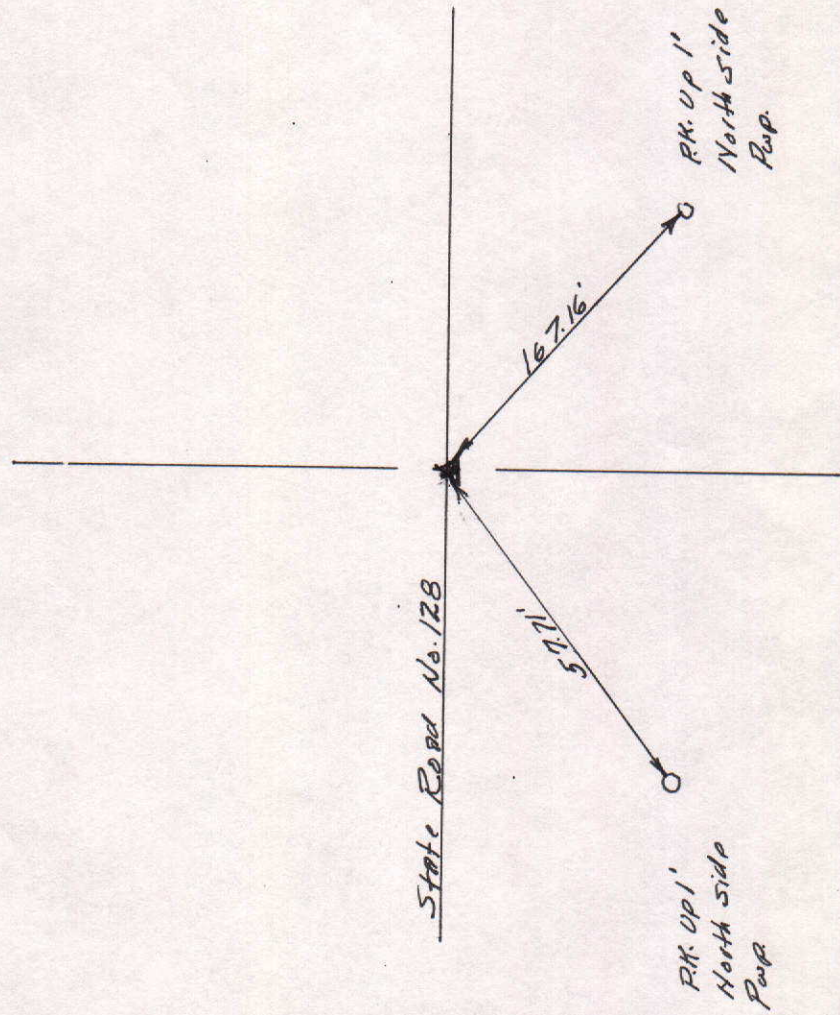

Approved: _____ Date: _____
 COUNTY SURVEYOR